

## PD256 PZ256



### 1


SMT

485 Modbus LED  
DL/T 645-2007 ;  
4 0 20 mA/ 4 20 mA  
4  
" " " "

GB/T 17883 0.2S 0.5S  
GB/T 17882 2 3  
DL/T 614  
DL/T 645-2007  
GB/T 13850

GB/T 22264.1 1  
GB/T 22264.2 2  
GB/T 22264.3 3 :  
GB/T 22264.4 4 :  
GB/T 22264.5 5 :  
GB/T 22264.7 7 :  
GB/T 22264.8 8 :

### 2

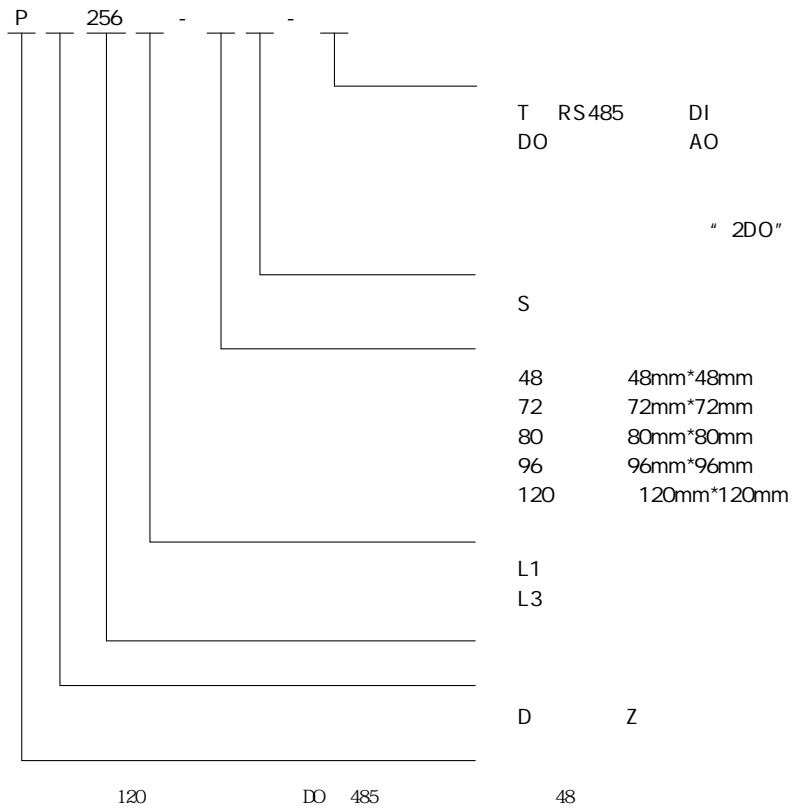

PD256 PZ256

3

1

			AC 400V
		1.2	2 /5s
			2VA
			AC 5A
		1.2	10 /5s
			1VA
			45Hz 65Hz
			0.5
			0.5
			± 0.05Hz
			0.5
			1.0
			0.5
			2.0
			4
			AC250V/2A DC30V/2A
		0 20mA 4 20mA 0.5	500
		RS485	Modbus-RTU DL/T 645-2007 1200 2400 4800 9600 19200
			LED
			10000 np/kWh 10000 np/kvarh
			AC DC85V 265V 50Hz/60Hz
			5VA

4

- 4.1 690V 45Hz 65Hz
- 4.2 :- 25 +55 , 93%RH,  
2500m
- 4.3

# PD256 PZ256

5

2


72	T		
	T1DO		
	T1AO		
	1DO1DI		
	T1DO1DI		
80	T		
	T1DO		
	T1AO		
	1DO1DI		
	T1DO1DI		
96	T		
	1DO		
	T1DO		
	T2DO		
	T1DI		
	T1AO		
	T2DO2DI		
	4DO		
	T4DO		
	4DI		
	T4DI		
	120	T	
1DO			
T1DO			
T1DI			
T1AO			
T2DO2DI			
4DO			
T4DO			
4DI			
T4DI			

—



PD256 PZ256

7.3

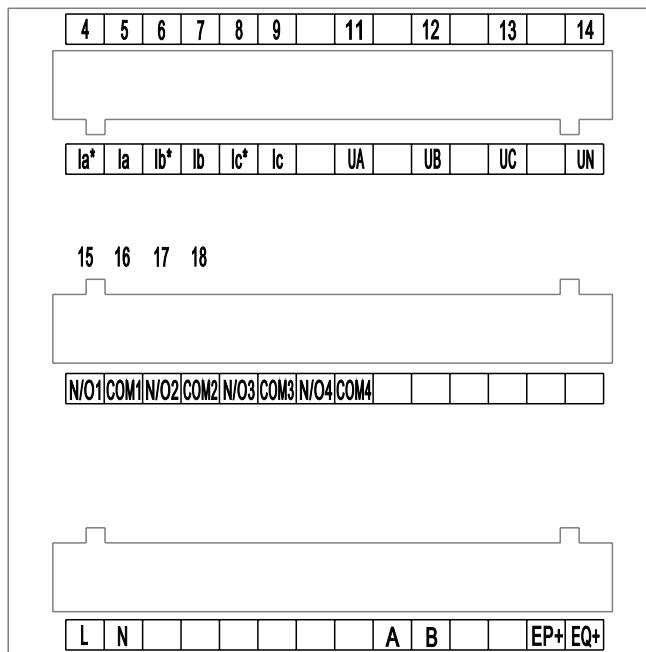


3

7.4

## PD256 PZ256

7.5

3

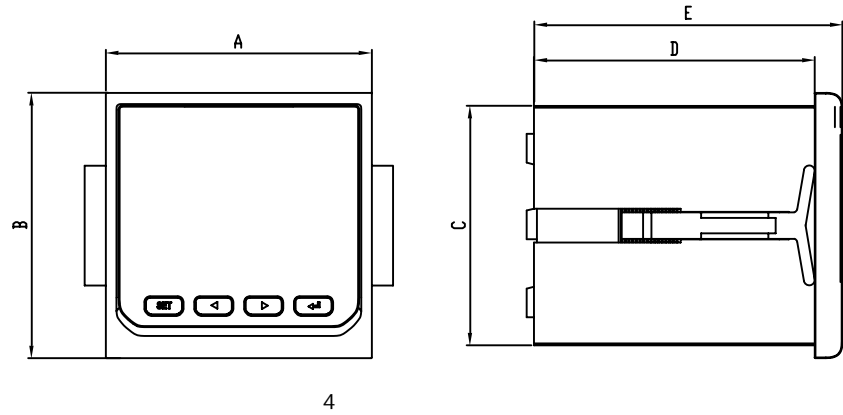

3

				D	E	( × )
PD/Z256-72S	72mm	72mm	65mm	76mm	83.5mm	66mm× 66mm
PD/Z256-80S	80mm	80mm	74mm	76mm	83.5mm	75mm× 75mm
PD/Z256-96S	96mm	96mm	89mm	76mm	84.5mm	90mm× 90mm
PD/Z256-120S	120mm	120mm	110mm	76mm	84.5mm	111mm× 111mm