

TGB1NLE - 40



1

TGB1NLE - 40
230V


40A

50Hz

TGB1NLG - 40

2

TG B 1N LE - 40 1P+N C 16 30mA

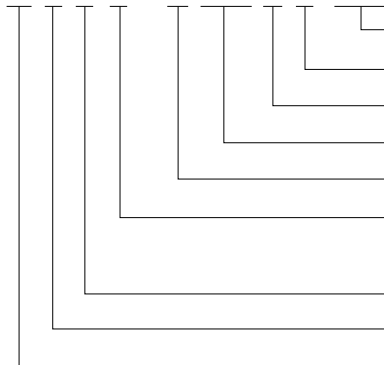

mA
A
C/D
(1P+N N)
A 40
LE
LG

3

3.1

1

1

		TGB1NLE - 40
		GB/T16917.1 IEC61009-1
		CCC
		1P+N(N)
Hz		50
A	I _{nm}	40
A	I _e	6 10 16 20 25 32 40
V	U _e	AC230
V	U _i	500
kV	U _{imp}	4
kA	I _{cs}	4.5
kA	I _{cn}	4.5
		C(5In 10In) D(10In 14In)
		2
		-
nA	I _n	30 50
U _{vo} =280V± 5		0.1s
		10000
		20000
		IP20
		-35 +70
		2000m
(mm ²)		10
(N)		1.5

TGB1NLE - 40

1

3.2


2

2

		A			
a	1.13In		t 1h		
	1.45In	1.13In	t 1h		5s
	2.55In		1s t 60s In 32A 1s t 120s In 32A		
b	5In		t 0.1s		
	10In		t 0.1s		
c	10In		t 0.1s		
	14In		t 0.1s		

30

3.3

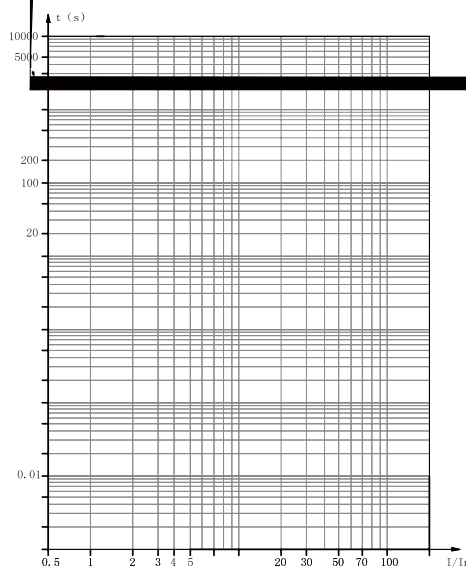

C

DEBÄNE, 2008 & 2009, 62K fi é ?

3.4

10mm²

3


1.5N·m

3

A	mm ²
6	1
10	1.5
16 20	2.5
25	4
32	6
40	10

TGB1NLE - 40

4

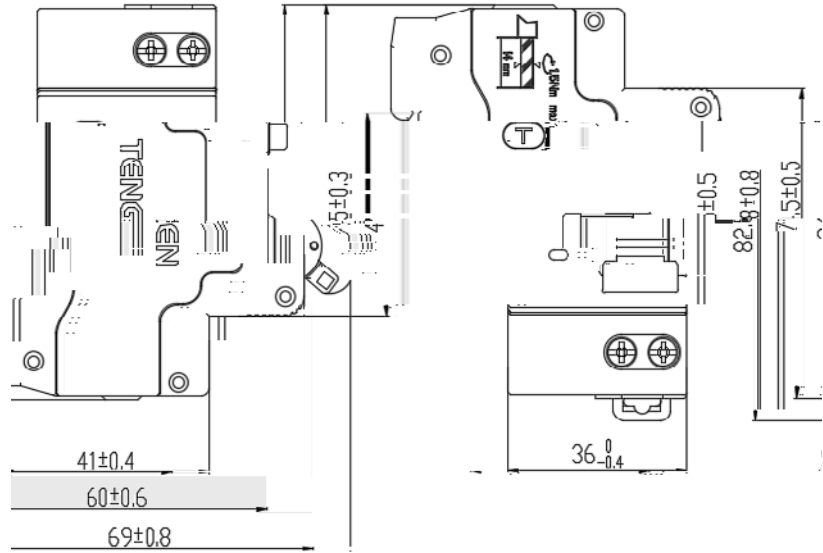

5

5.1	TGB1NLE - 40
5.2	C
5.3	10A
5.4	30mA
5.5	50
5.6	TGB1NLE - 40 1P+N C10 30mA 50